




600x1200 MM | 600x600 MM



Kajaria Plant, Gailpur, Rajasthan

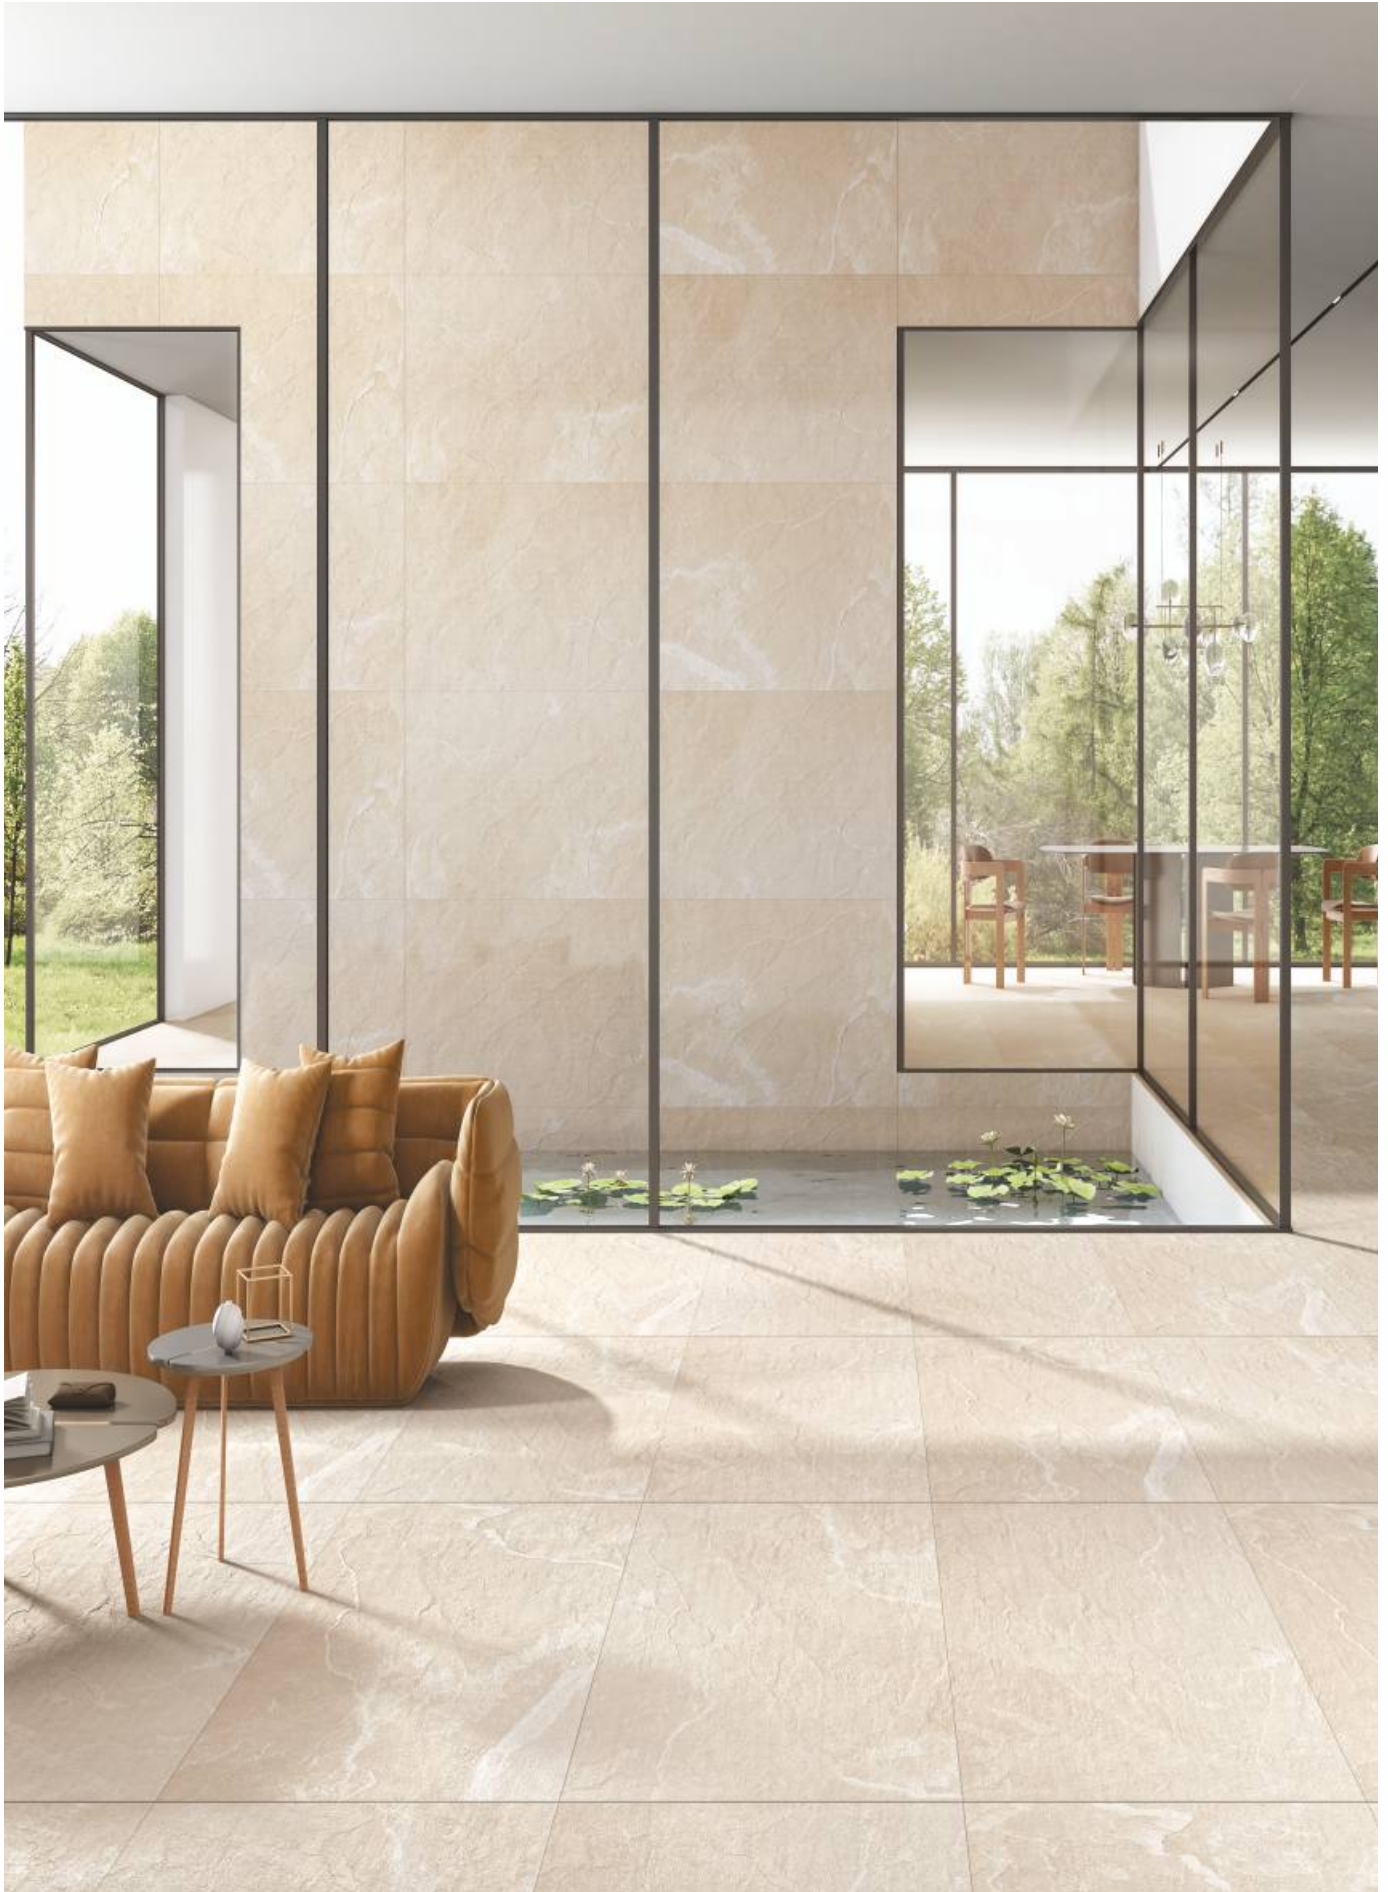

Kajaria Plant, Srikalahasti, Andhra Pradesh



Kerovit Plant, Morbi, Gujarat



Gresbond Plant, Gailpur, Rajasthan

37


YEARS OF
EXCELLENCE

14

STATE-OF-THE-ART
MANUFACTURING FACILITIES
(TILES, BATHWARE & ADHESIVES)

119

MN. SQ. METERS
ANNUAL SALES VOLUME

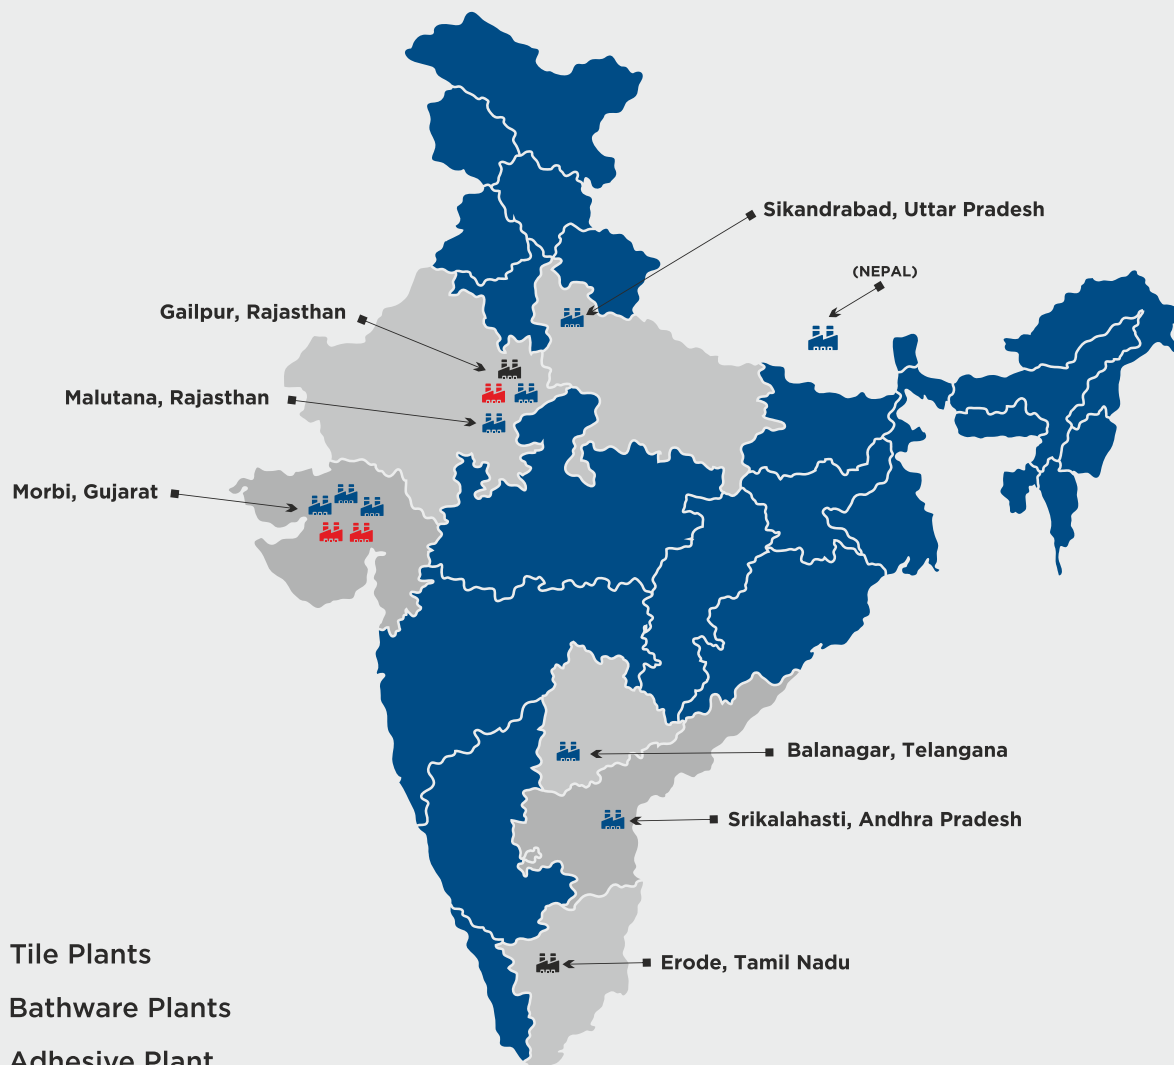

- 9 Tile Plants
- 3 Bathware Plants
- 2 Adhesive Plant



FULL BODY

VITRIFIED TILES

The **full body collection** reproduces the effects of the finest stone, combining the strength and durability of vitrified tiles. These full-body tiles introduce an aesthetic culture that enhances both indoor and outdoor spaces to a whole new level. These random vitrified tiles demonstrate superb resilience to harsh weather, making them ideal for high traffic areas.

600x1200 mm | Matt

600x600 mm | Matt

INDEX

600x1200 MM | ORNNATE

MATT

BLACK MARQUINA	08
BLACK MARQUINA LINER	08
CEMENTO CREMA	08
CEMENTO BARLEY	08
CEMENTO GREY	08
FLORITO GREY	08
FLORITO CREMA	08
FLORITO BARLEY	08
IMPERIAL CREMA	10
IMPERIAL BARLEY	10
IMPERIAL GREY	10
LIMESTONE CREMA	10
LIMESTONE BARLEY	10
LIMESTONE GREY	10
MARQUINA NERO	12
SIENA CREMA	12
SIENA BARLEY	12
SIENA GREY	12
STATUARIO WHITE	12
STATUARIO WHITE LINER	12
STATUARIO PEARL	12

600x1200 MM | STONEART

MATT

K 12660 (WHITE) - PLAIN	16
K 12660 (WHITE) - LINER	16
K 12660 (WHITE) - GEOMETRIC	16
K 12660 (WHITE) - MAGIC	16
K 12660 (WHITE) - SLATE	16
K 12660 (WHITE) - PENTAGON	16
K 12660 (WHITE) - ROCK	16
K 12660 (WHITE) - HEXAGON	16
K 12661 (CREMA) - PLAIN	19
K 12661 (CREMA) - LINER	19
K 12661 (CREMA) - GEOMETRIC	19
K 12661 (CREMA) - MAGIC	19
K 12661 (CREMA) - SLATE	19


K 12661 (CREMA) - PENTAGON	19
K 12661 (CREMA) - ROCK	19
K 12661 (CREMA) - HEXAGON	19
K 12662 (DARK GREY) - PLAIN	20
K 12662 (DARK GREY) - LINER	20
K 12662 (DARK GREY) - GEOMETRIC	20
K 12662 (DARK GREY) - MAGIC	20
K 12662 (DARK GREY) - SLATE	20
K 12662 (DARK GREY) - PENTAGON	20
K 12662 (DARK GREY) - ROCK	20
K 12662 (DARK GREY) - HEXAGON	20
K 12663 (BROWN) - PLAIN	23
K 12663 (BROWN) - LINER	23
K 12663 (BROWN) - GEOMETRIC	23
K 12663 (BROWN) - MAGIC	23
K 12663 (BROWN) - SLATE	23
K 12663 (BROWN) - PENTAGON	23
K 12663 (BROWN) - ROCK	23
K 12663 (BROWN) - HEXAGON	23
K 12664 (BARLEY) - PLAIN	24
K 12664 (BARLEY) - LINER	24
K 12664 (BARLEY) - GEOMETRIC	24
K 12664 (BARLEY) - MAGIC	24
K 12664 (BARLEY) - SLATE	24
K 12664 (BARLEY) - PENTAGON	24
K 12664 (BARLEY) - ROCK	24
K 12664 (BARLEY) - HEXAGON	24
K 12665 (GREY) - PLAIN	27
K 12665 (GREY) - LINER	27
K 12665 (GREY) - GEOMETRIC	27
K 12665 (GREY) - MAGIC	27
K 12665 (GREY) - SLATE	27
K 12665 (GREY) - PENTAGON	27
K 12665 (GREY) - ROCK	27
K 12665 (GREY) - HEXAGON	27
K 12666 (BLACK) - PLAIN	29
K 12666 (BLACK) - LINER	29

K 12666 (BLACK) - GEOMETRIC	29
K 12666 (BLACK) - MAGIC	29
K 12666 (BLACK) - SLATE	29
K 12666 (BLACK) - PENTAGON	29
K 12666 (BLACK) - ROCK	29
K 12666 (BLACK) - HEXAGON	29
K 12667 (JAISALEMER) - PLAIN	30
K 12667 (JAISALEMER) - LINER	30
K 12667 (JAISALEMER) - GEOMETRIC	30
K 12667 (JAISALEMER) - MAGIC	30
K 12667 (JAISALEMER) - SLATE	30
K 12667 (JAISALEMER) - PENTAGON	30
K 12667 (JAISALEMER) - ROCK	30
K 12667 (JAISALEMER) - HEXAGON	30
K 12668 (KOTA GREEN) - PLAIN	31
K 12668 (KOTA GREEN) - LINER	31
K 12668 (KOTA GREEN) - GEOMETRIC	31
K 12668 (KOTA GREEN) - MAGIC	31
K 12668 (KOTA GREEN) - SLATE	31
K 12668 (KOTA GREEN) - PENTAGON	31
K 12668 (KOTA GREEN) - ROCK	31
K 12668 (KOTA GREEN) - HEXAGON	31

600x600 MM | STONEART

MATT

K 6501 (CREMA) - PLAIN	32
K 6501 (CREMA) - ROCK	32
K 6502 (DARK GREY) - PLAIN	32
K 6502 (DARK GREY) - ROCK	32
K 6503 (BROWN) - PLAIN	32
K 6503 (BROWN) - ROCK	32
K 6504 (BARLEY) - PLAIN	34
K 6504 (BARLEY) - ROCK	34
K 6506 (BLACK) - PLAIN	34
K 6506 (BLACK) - ROCK	34
K 6508 (KOTA GREEN) - PLAIN	34
K 6508 (KOTA GREEN) - ROCK	34



Solid



**Safe,
clean,
fireproof**



**Highly
sustainable**

Benefits of the Surface



**HIGHLY
DURABLE**



**DIMENSIONAL
STABILITY**



**LESS WATER
ABSORPTION**



**SCRATCH
RESISTANT**



**EASY TO CLEAN
AND MAINTAIN**



**HEAT
RESISTANT**



**STAIN
RESISTANT**



**CHEMICAL
RESISTANT**



**ULTRA-VIOLET
LIGHT RESISTANT**

Various Edge Profiles



Squared straight edge



Squared 45° edge



Bullnose



Rounded double straight edge

FULL BODY

VITRIFIED TILES

Easy to clean, resistant to acid, sanitizable, does not burn or release harmful substances.

Long-lasting and recyclable. These tiles are manufactured by adopting environment-friendly practices.

Solid, strong and uniform, it maintains its appearance even in the event of extreme wear and damage.

A wide array of choices for your space that has distinctive functional and aesthetic needs.

Application Areas



LIVING ROOM



BATHROOM



KITCHEN



OFFICE



SHOWROOM



RESTAURANT



CAFÉ



AIRPORT



MUSEUM



HOTEL



BEACH
RESORT



SWIMMING
POOL DECK



TERRACE &
BALCONY

Kajaria

ORNNATE

DIGITAL
FULL BODY
VITRIFIED TILES




Discover the striking
textures and nature-like,
captivating colors

From the soft elegance of
Grey to the bold statement of
Black Marquina and the
earthy warmth of Barley and
beyond, the palette celebrates
nature's hues. Each shade tells
a story of grace, offering
designers and homeowners
the perfect balance of
aesthetics and performance.


600x1200 mm




Siena Crema

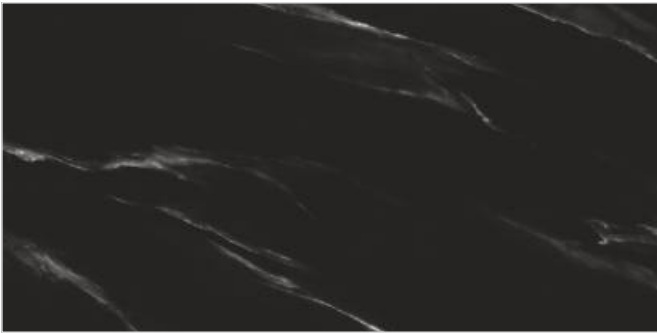

Black Marquina

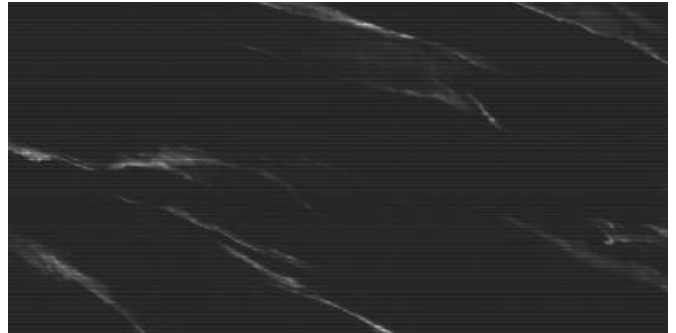


Black Marquina Liner

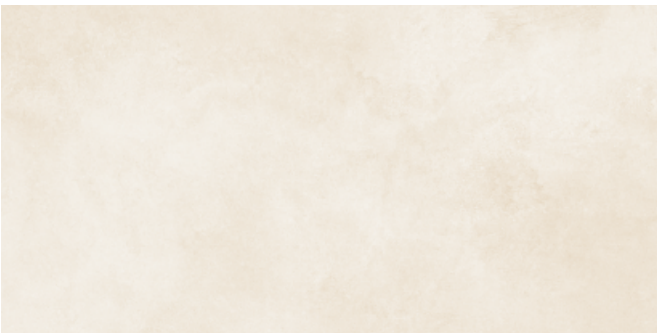

Cemento Crema



Cemento Barley

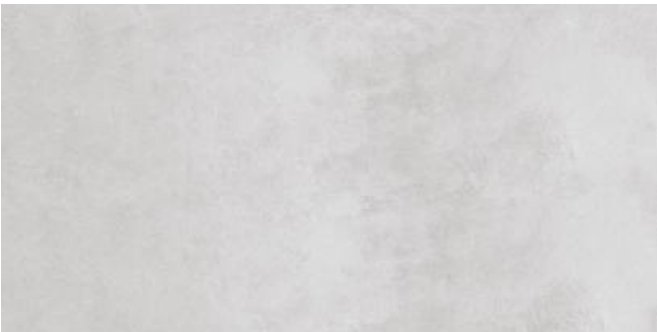

Cemento Grey



Florito Grey




Florito Crema



Florito Barley



Cemento Crema

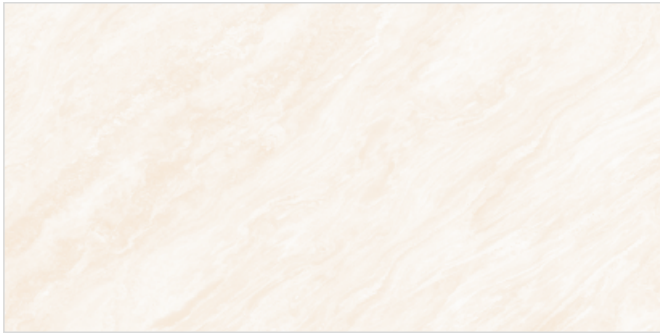

Imperial Crema



Imperial Barley



Imperial Grey



Limestone Crema




Limestone Barley



Limestone Grey



Limestone Barley

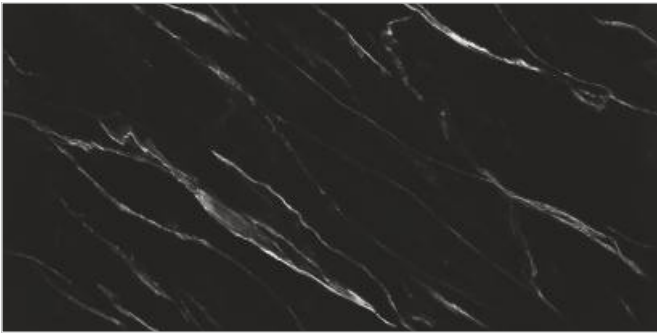

Marquina Nero



Siena Crema



Siena Barley



Siena Grey



Statuario White



Statuario White Liner



Statuario Pearl



Siena Barley

STONE ART

FULL BODY
VITRIFIED TILES





Captures fine stone aesthetics with vitrified tile strength and durability.

These full-body tiles introduce an aesthetic culture that enhances both indoor and outdoor spaces to a whole new level. These random vitrified tiles demonstrate superb resilience to harsh weather, making them ideal for high-traffic areas.

600x1200 mm | 600x600 mm

Available Punches in 9 Colors

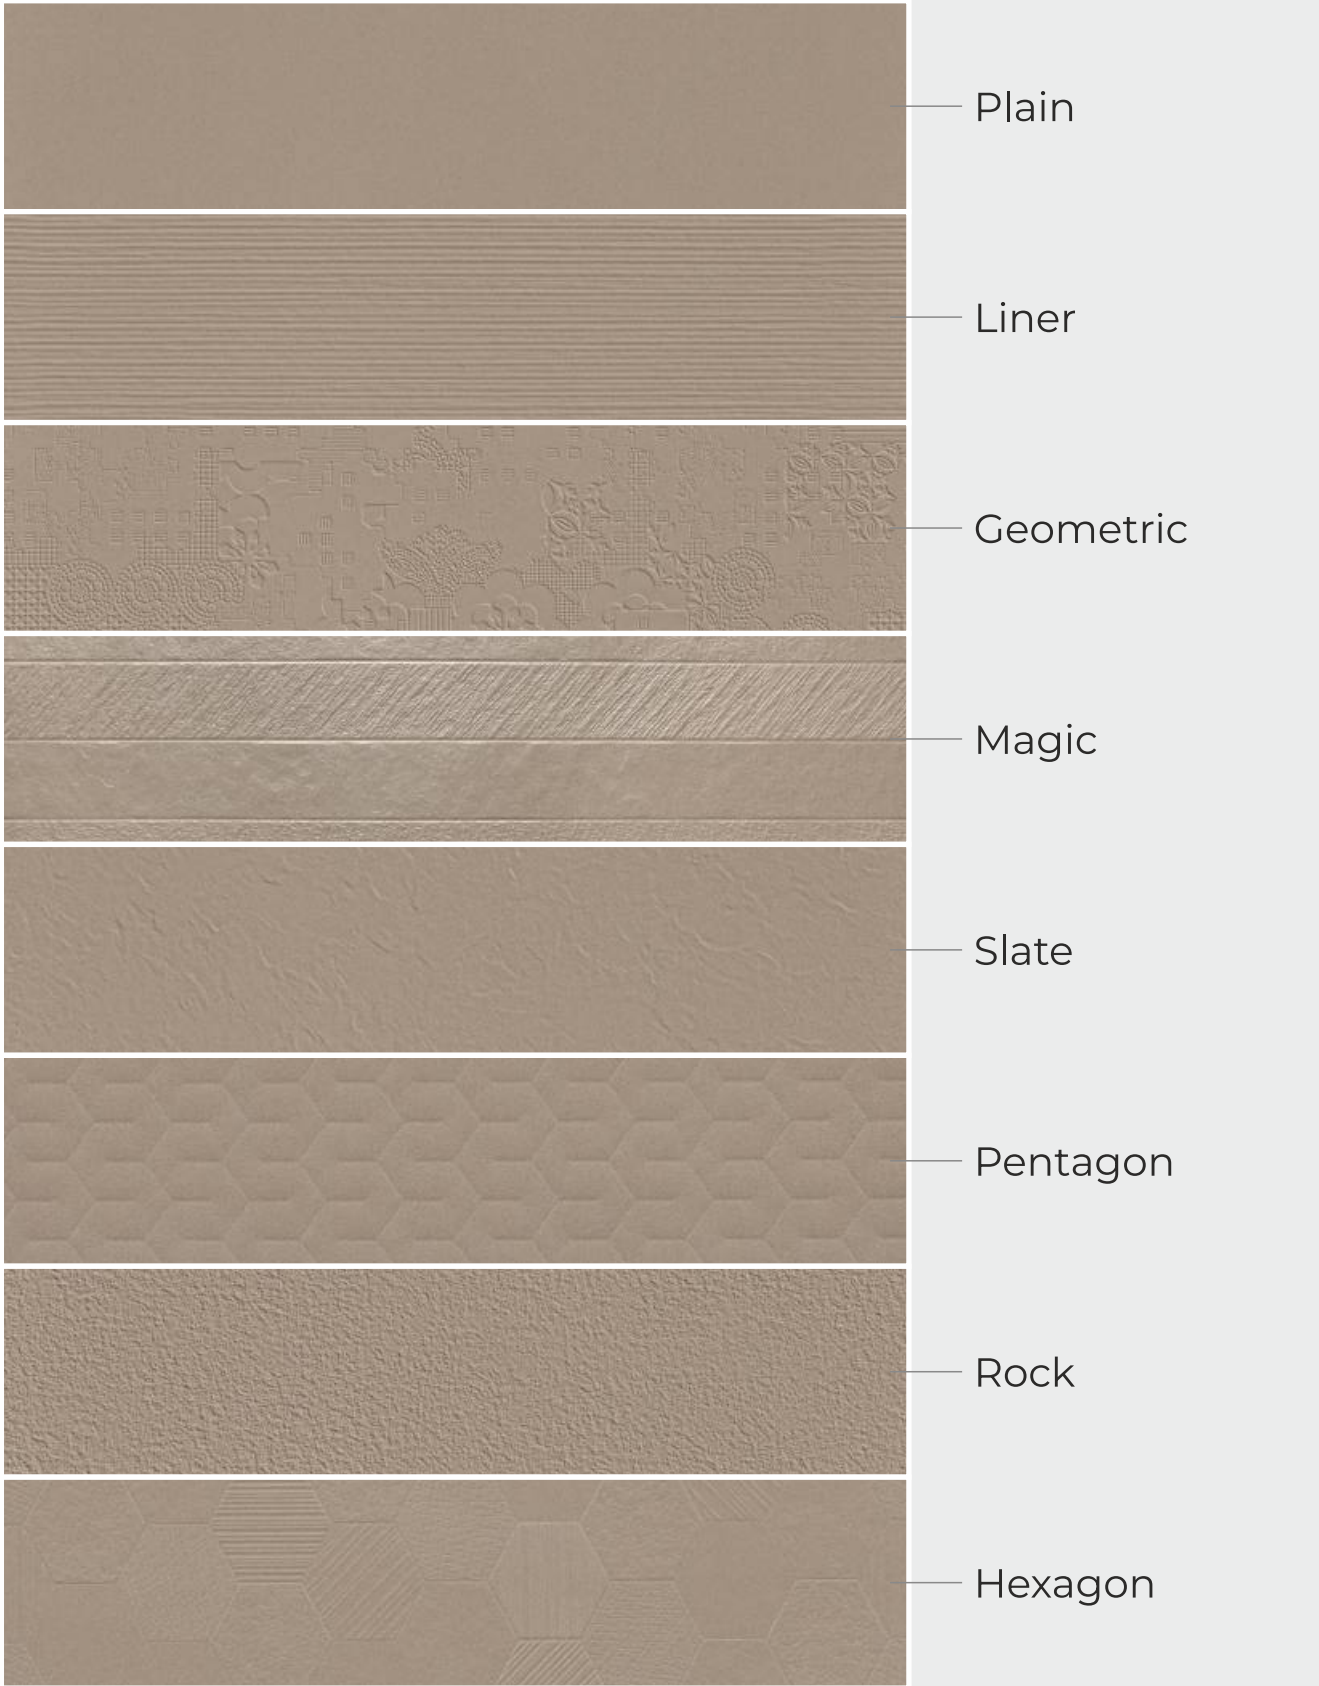

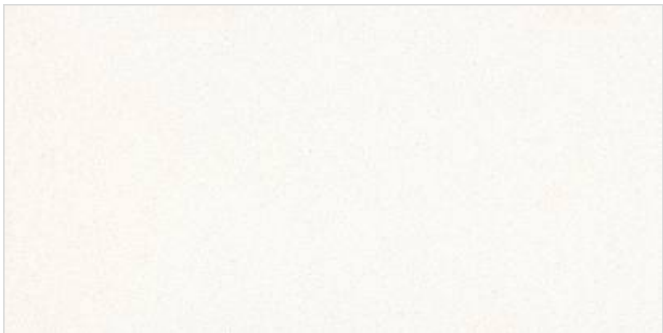


K 12660 (White) - Plain




K 12660 (White) - Liner




K 12660 (White) - Geometric

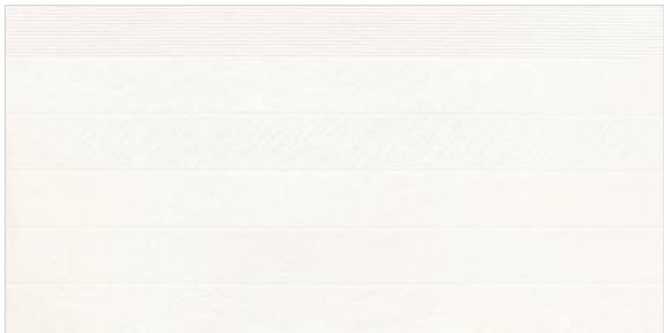

K 12660 (White) - Magic

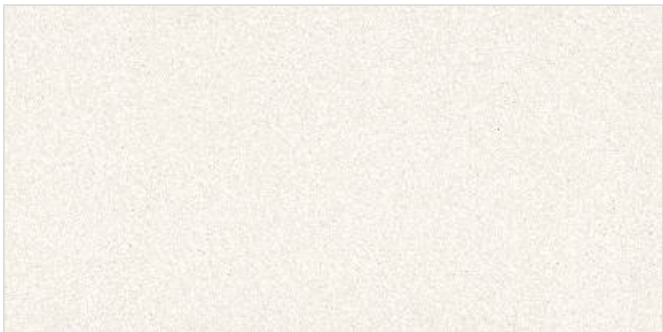


K 12660 (White) - Slate

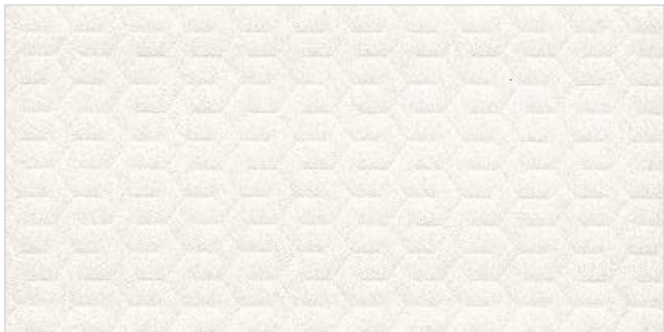

K 12660 (White) - Pentagon



K 12660 (White) - Rock

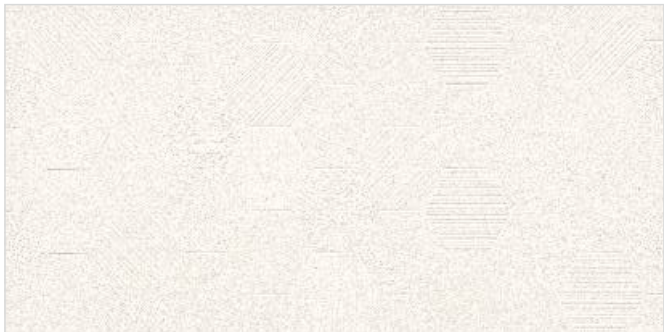

K 12660 (White) - Hexagon



K 12660 (White) - Liner



K 12660 (Crema) - Pentagon



K 12661 (Crema) - Plain



K 12661 (Crema) - Liner



K 12661 (Crema) - Geometric



K 12661 (Crema) - Magic



K 12661 (Crema) - Slate




K 12661 (Crema) - Pentagon



K 12661 (Crema) - Rock



K 12661 (Crema) - Hexagon

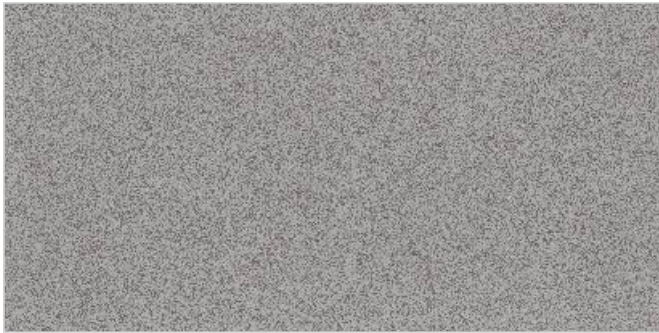

K 12662 (Dark Grey) - Plain



K 12662 (Dark Grey) - Liner




K 12662 (Dark Grey) - Geometric




K 12662 (Dark Grey) - Magic



K 12662 (Dark Grey) - Slate

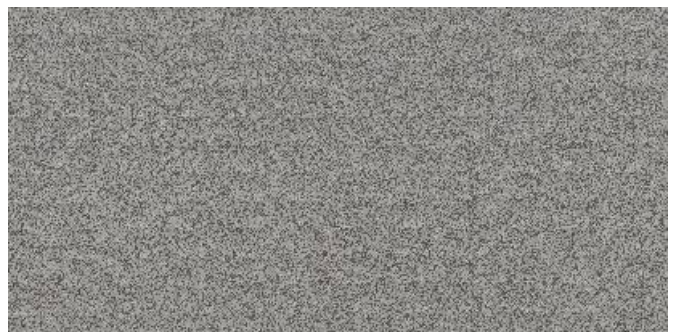

K 12662 (Dark Grey) - Pentagon

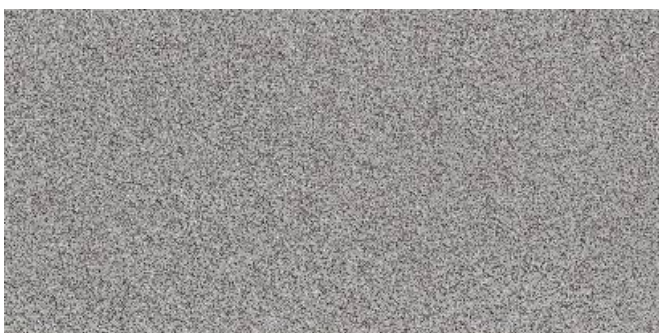


K 12662 (Dark Grey) - Rock




K 12662 (Dark Grey) - Hexagon



K 12662 (Dark Grey) - Rock

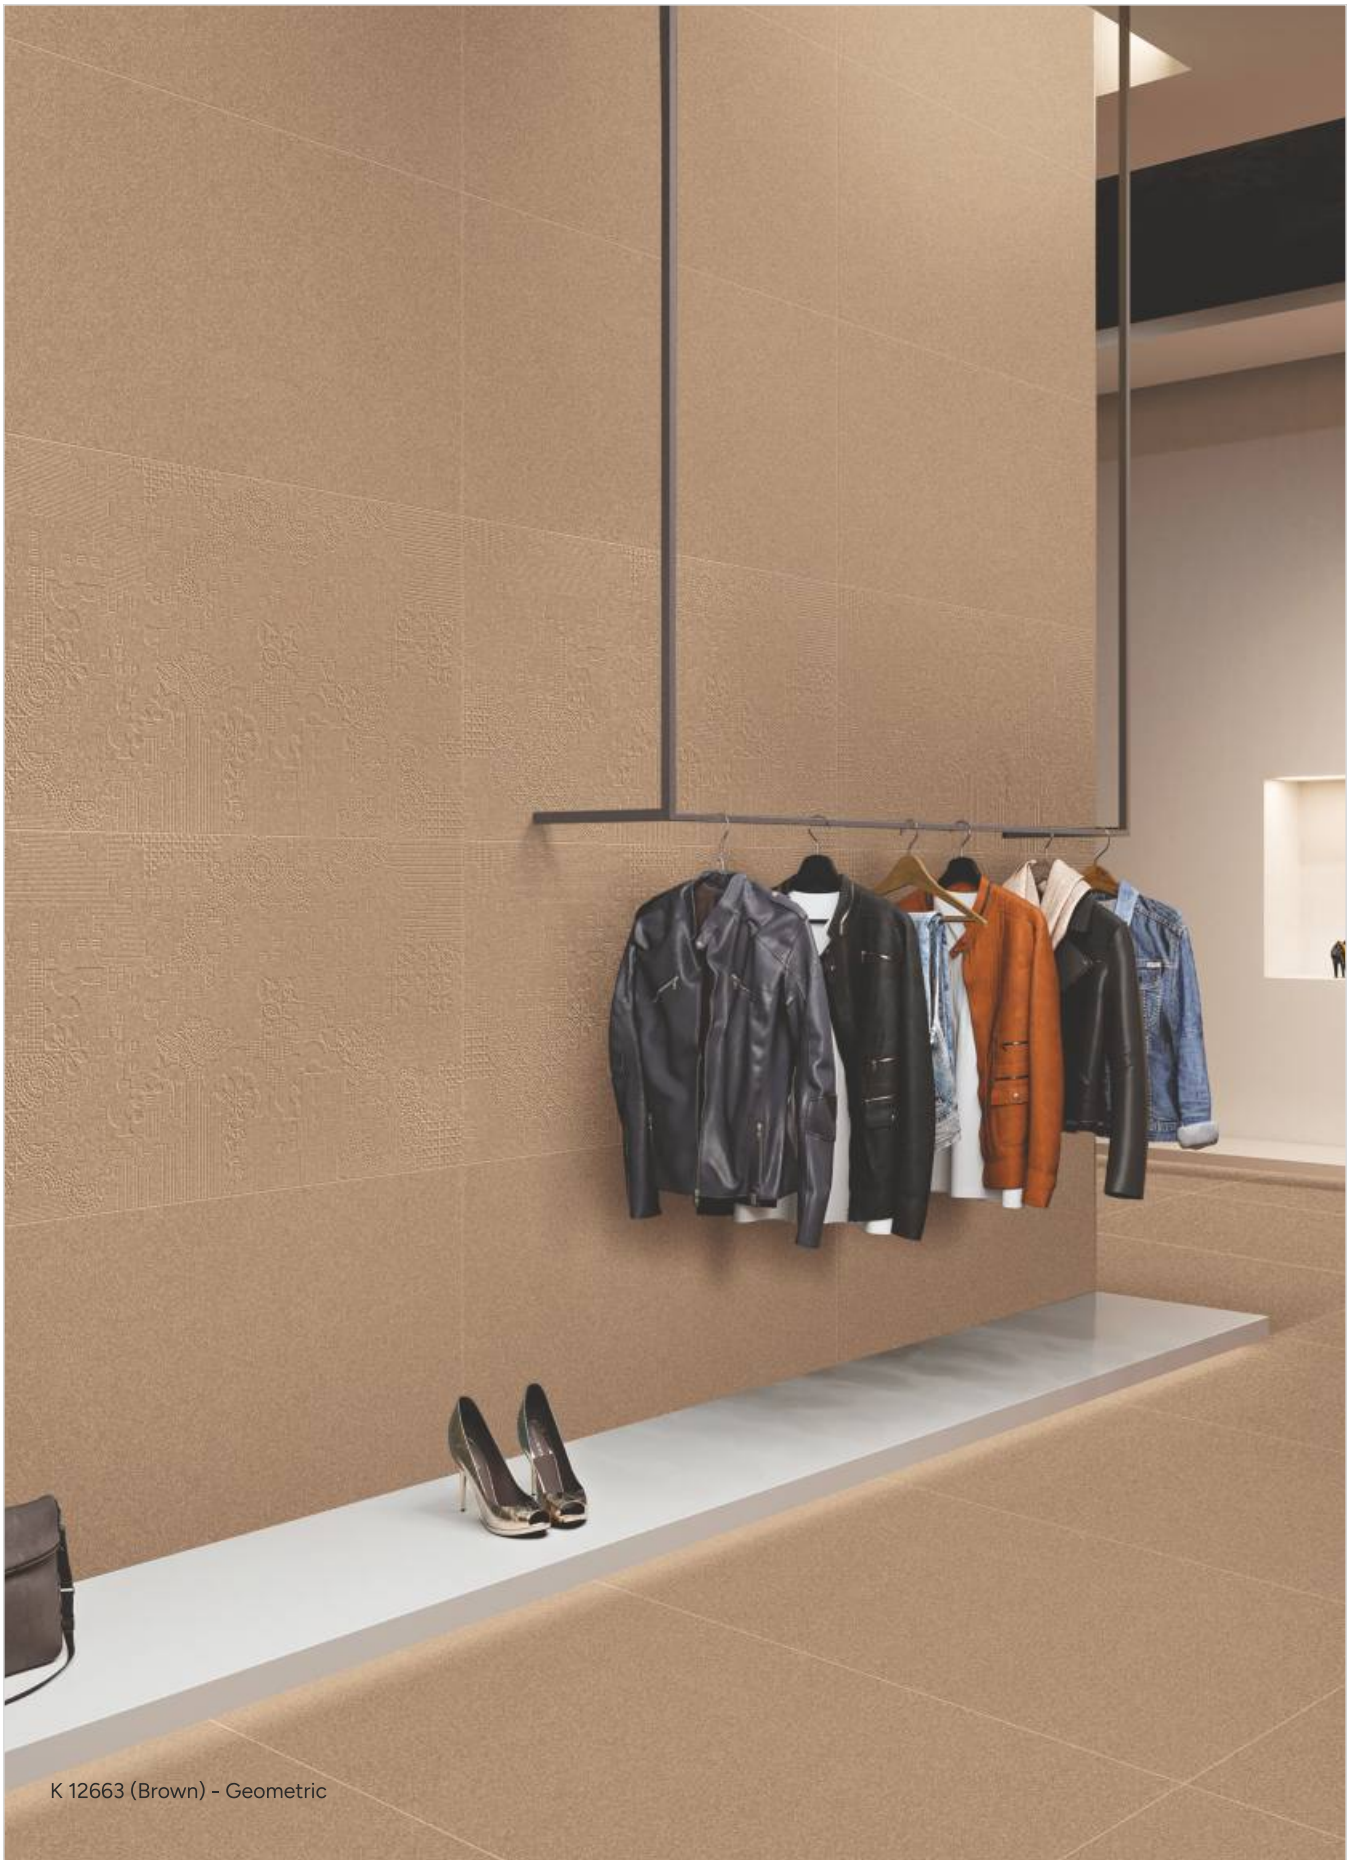


K 12663 (Brown) - Geometric

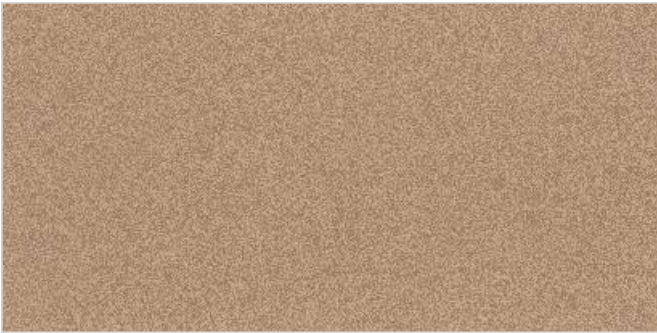

K 12663 (Brown) - Plain



K 12663 (Brown) - Liner

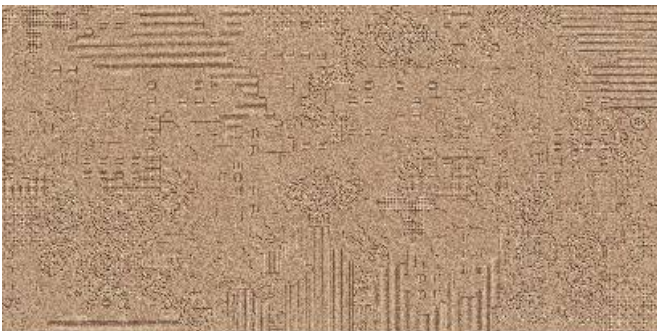

K 12663 (Brown) - Geometric



K 12663 (Brown) - Magic



K 12663 (Brown) - Slate



K 12663 (Brown) - Pentagon



K 12663 (Brown) - Rock




K 12663 (Brown) - Hexagon



K 12664 (Barley) - Plain



K 12664 (Barley) - Liner

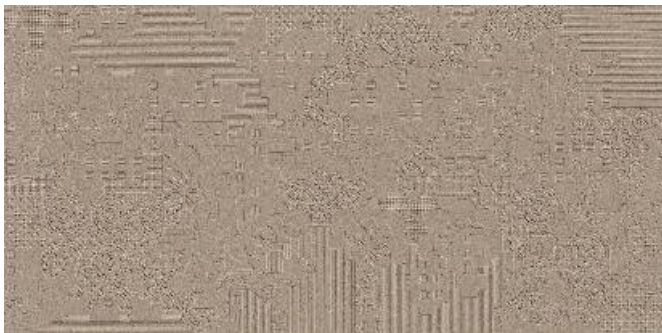

K 12664 (Barley) - Geometric



K 12664 (Barley) - Magic



K 12664 (Barley) - Slate



K 12664 (Barley) - Pentagon



K 12664 (Barley) - Rock



K 12664 (Barley) - Hexagon



K 12664 (Barley) - Liner & K 12664 (Barley) - Plain




K 12665 (Grey) - Geometric & K 12665 (Grey) - Plain



K 12665 (Grey) - Plain



K 12665 (Grey) - Liner

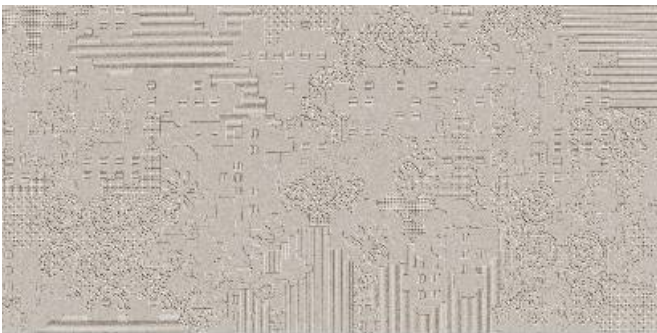


K 12665 (Grey) - Geometric



K 12665 (Grey) - Magic



K 12665 (Grey) - Slate

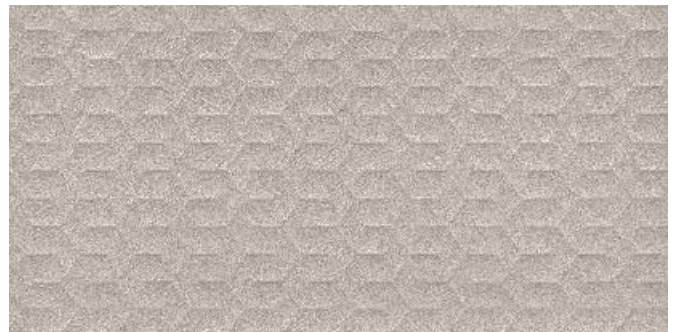

K 12665 (Grey) - Pentagon



K 12665 (Grey) - Rock




K 12665 (Grey) - Hexagon



K 12666 (Black) - Plain



K 12666 (Black) - Plain

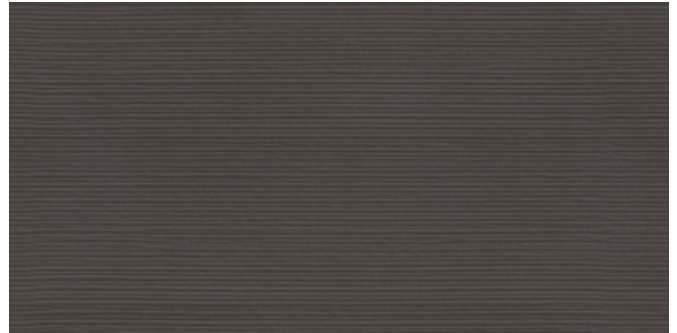

K 12666 (Black) - Liner



K 12666 (Black) - Geometric




K 12666 (Black) - Magic



K 12666 (Black) - Slate




K 12666 (Black) - Pentagon

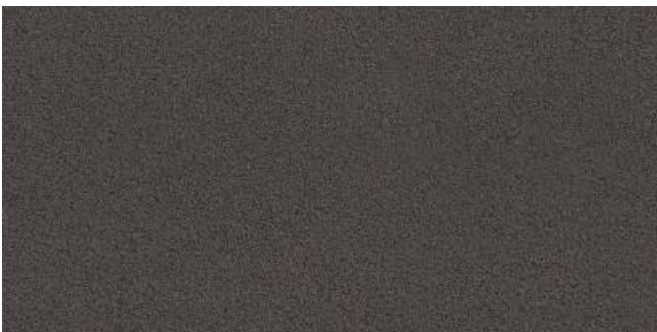

K 12666 (Black) - Rock



K 12666 (Black) - Hexagon

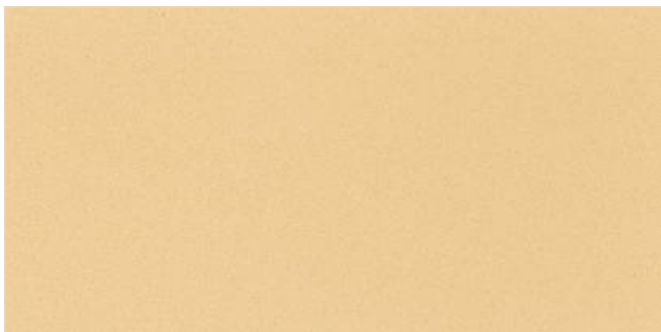

K 12667 (Jaisalemer) - Plain



K 12667 (Jaisalemer) - Liner



K 12667 (Jaisalemer) - Geometric




K 12667 (Jaisalemer) - Magic



K 12667 (Jaisalemer) - Slate




K 12667 (Jaisalemer) - Pentagon

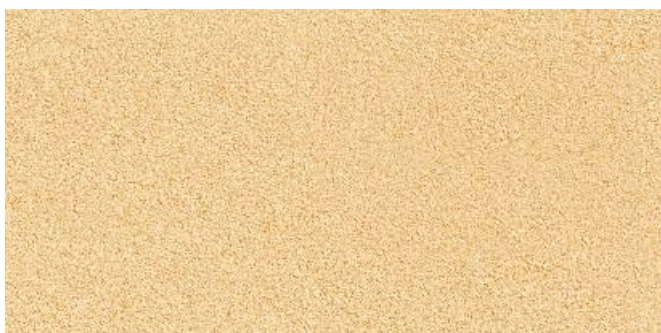

K 12667 (Jaisalemer) - Rock




K 12667 (Jaisalemer) - Hexagon

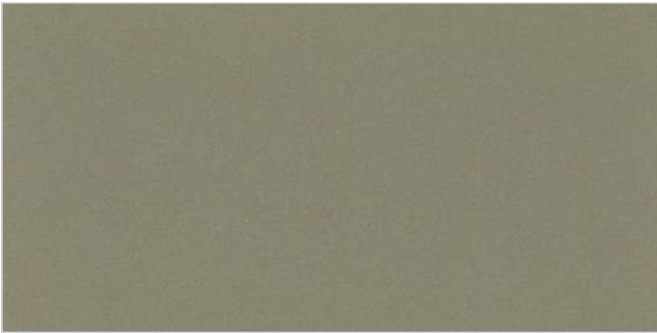


K 12668 (Kota Green) - Plain



K 12668 (Kota Green) - Liner

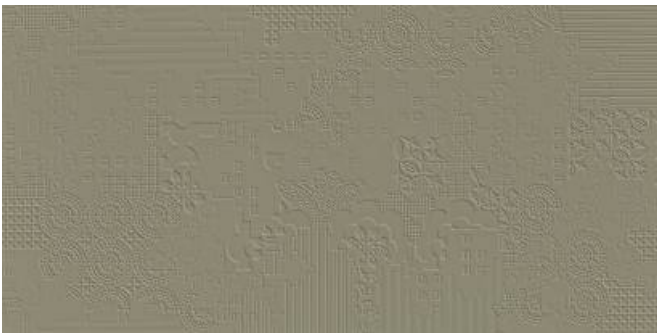


K 12668 (Kota Green) - Geometric

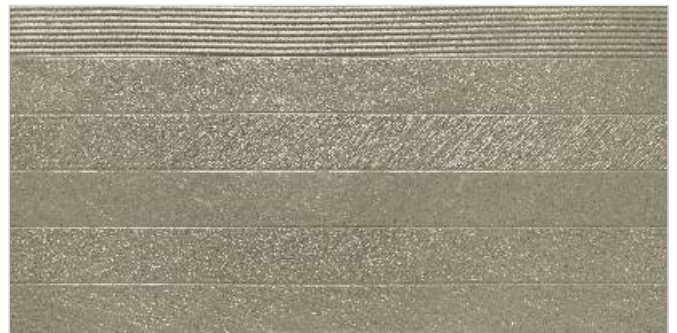

K 12668 (Kota Green) - Magic



K 12668 (Kota Green) - Slate

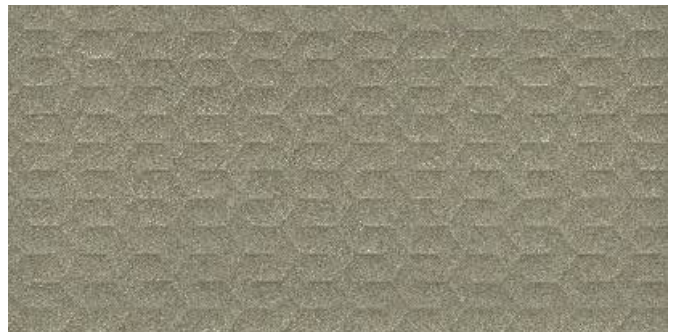

K 12668 (Kota Green) - Pentagon



K 12668 (Kota Green) - Rock




K 12668 (Kota Green) - Hexagon




K 6501 (Crema) - Plain



K 6501 (Crema) - Rock

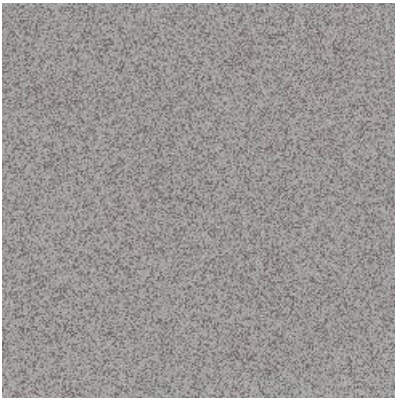

K 6502 (Dark Grey) - Plain

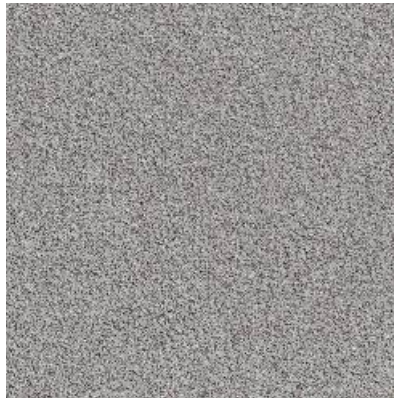


K 6502 (Dark Grey) - Rock




K 6503 (Brown) - Plain




K 6503 (Brown) - Rock

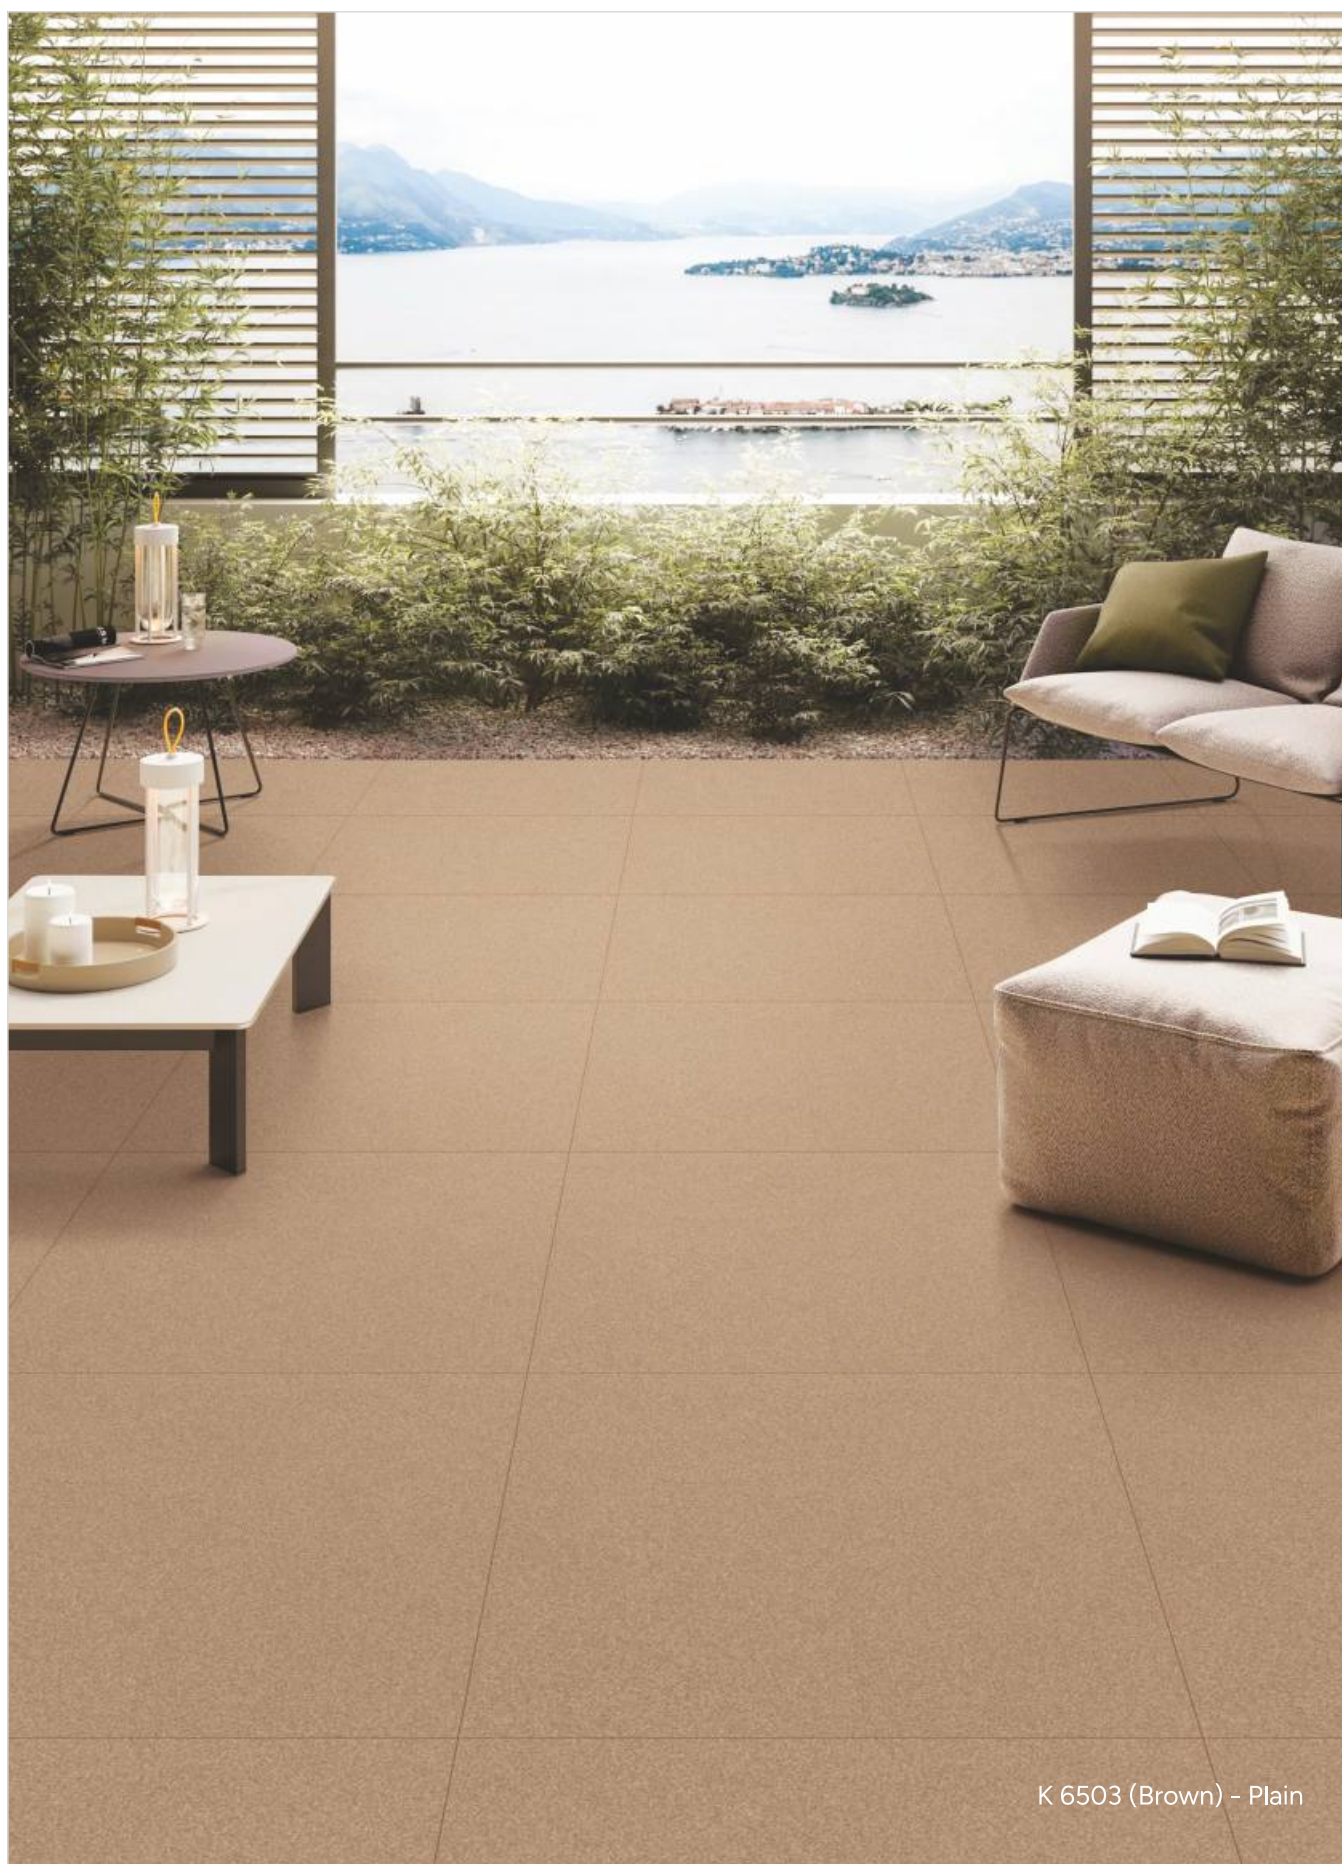


K 6503 (Brown) - Plain

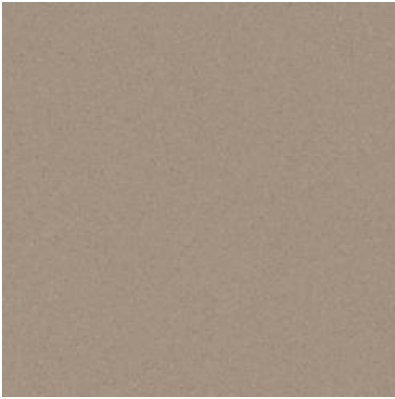

K 6504 (Barley) - Plain

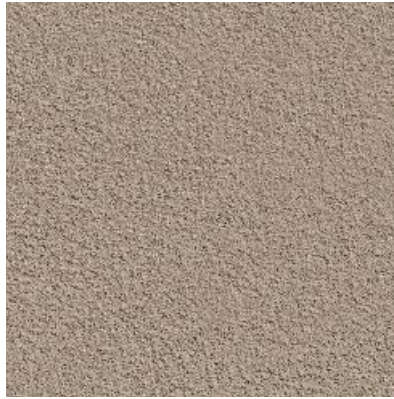

K 6504 (Barley) - Rock

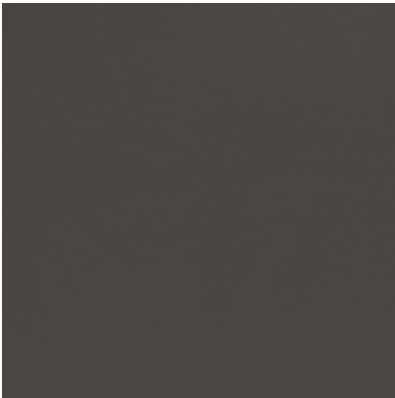

K 6506 (Black) - Plain



K 6506 (Black) - Rock



K 6508 (Kota Green) - Plain



K 6508 (Kota Green) - Rock



K 6508 (Kota Green) - Plain

A **Kajaria** Company



NEW PLANT

New Dawn New Milestones

Kerovit is all set to transform the Indian sanitaryware industry with the launch of their **2nd state-of-the-art manufacturing plant, Kerovit Global Private Limited (KGPL)** at Morbi, Gujarat.



A big leap in the sanitaryware industry



6 lac sq.m.
fully automated
sanitaryware plant



Cutting-edge R&D lab
to craft innovative designs and
enhanced functionality



**Global standard
technology** to deliver
exceptional quality in
rapid TAT



**In-house
manufacturing capability**
to ensure reliability,
efficiency and future-readiness



**Increased production
capacity** to meet
growing market demands,
driving more business



**100% and multi-level
QC tests** to ensure zero leakage
and standard load-bearing capacity



**Experienced pool of
talented manpower**
for utmost precision and
quality assurance

The new KGPL plant is all set to revolutionize the sanitaryware market in India! Get ready to stride ahead with the bathrooms you desire.

Time to switch

from the Old cement method to


Gresbond tile adhesives for a perfect tile finish



Old Cement Method



Shrinkage



Unlevelled Floor




Cracks


Gresbond Adhesives



Zero Shrinkage



Levelled Floor



High Strength

Benefits of using Gresbond Tile Adhesives



Water
Resistant



Rapid Surface Readiness
in Under 24 Hours



Thermal Shock
Resistance



Stains and Seepage
Resistant



Suitable for Use on
All Surfaces*



Seamless Bond Between
Tile and Substrate



CX-1

FOR INTERNAL WALLS & CERAMIC FLOOR TILES.

Features

- High Bond Strength
- Extended open time
- Low VOC
- Fast & Economical
- No Hollowness



VX-1

FOR INTERNAL FLOORS, WALLS & EXTERNAL FLOORS

Features

- For wet & dry area
- Extended open time
- Low VOC
- Highly polymer modified
- Non-slip adhesive



EX-5

FOR EXTERNAL WALLS & FLOORS

Features

- Formulated for elevations
- Extended open time
- Low VOC
- For wet & dry area
- Flexible



LX-7

FOR INTERNAL AND EXTERNAL FLOORS & WALLS

Features


- Formulated for large slabs & stones
- Extended open time
- Superior bond strength
- Flexible
- For vibration area
- Low VOC

Epoxy grouts for perfect tile finish

Available Colour Shades



Benefits of Epoxy Grouts

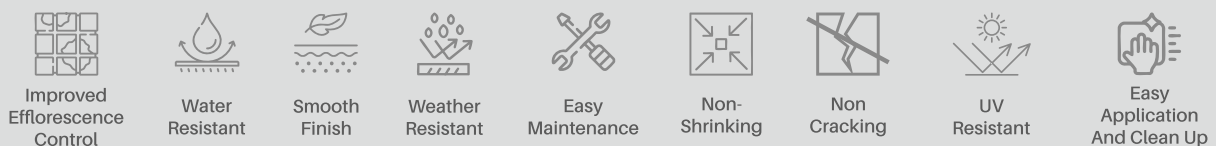

TECHNICAL SPECIFICATION - DIGITAL FULL BODY VITRIFIED TILES

S. No.	Properties	Group Bla - ISO 13006/EN-176	Group Bla - IS : 15622:2017	Kajaria Value	Test According to
Dimensions & Surface Quality					
1.	Deviation in length and width	± 0.6%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
2.	Deviation in thickness	± 5%	± 5%	± 4%	ISO 10545:2/IS:13630 (P-1)
3.	Deviation in straightness of sides	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
4.	Deviation in rectangularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
5.	Deviation in surface flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545:2/IS:13630 (P-1)
6.	Surface quality (%)	Minimum 95%	Minimum 95%	No visible defects	ISO 10545:2/IS:13630 (P-1)
Physical Characteristics					
7.	Scratch hardness of surface Mohs scale	Required	Min. 6	Min. 6	EN-101/IS:13630 (P-13)
8.	Water absorption	≤0.5%	Average 0.08, Individual maximum, 0.1%	≤0.05%	ISO 10545:3/IS: 13630 (P-2)
9.	Moisture expansion	Nil	0.02 Max	Nil	ISO 10545:10
10.	Deep abrasion	Max 175 mm ³	Max 140 mm ³	<140 mm ³	ISO 10545:6/IS:13630 (P-12)
Mechanical Characteristics					
11.	Breaking strength	1300 N	Min 1300	≥ 2000 N	ISO 10545:4/IS: 13630 (P-6)
12.	Modulus of rupture	≥ 35 N/mm ²	Average 35, Individual minimum 32	≥ 35 N/mm ²	ISO 10545:4/IS: 13630 (P-6)
Safety Characteristics					
13.	Density	Required	Min 2.20 gm/cc	2.34 gm/cc	DIN 51082/IS: 13630 (P-2)
14.	Skid resistance (Friction coefficient)	≥ 0.4	—	≥0.4	ISO 10545:17
Thermo Photo Characteristics					
15.	Thermal shock resistance	Resistant to 10 cycles	Min 10 cycles	Pass min 10 cycles	ISO 10545:9/IS: 13630 (P-5)
16.	Co efficient of thermal expansion	9x10 ⁻⁶ K ⁻¹ Max	6x10 ⁻⁶ K ⁻¹ Max	<6x10 ⁻⁶ K ⁻¹ Max	ISO 10545:8/IS:13630 (P-4)
17.	Frost resistance	Resistant	Required	Resistant	ISO 10545:12/IS: 13630 (P-10)
18.	Color resistance to UV light	Resistant	—	Resistant	DIN 51094
Chemical Characteristics					
19.	Stain resistance	Min Class 3	Required	Min conform to class 4	ISO 10545:14
20.	Chemical resistance HOUSEHOLD CHEMICALS & SWIMMING POOL SALTS	Min Class - UB	Required	Conforms to class - UA	ISO 10545:13/IS:13630 (P-7)
21.	Chemical resistance LOW CONCENTRATION ACIDS & ALKALIES	Min Class - ULB	Required	Conforms to class - ULA	ISO 10545:13/IS:13630 (P-7)
22.	Chemical resistance HIGH CONCENTRATION ACIDS & ALKALIES	Min Class - UHB	Required	Conforms to class - UHA	ISO 10545:13/IS:13630 (P-7)

Packing Details

S. No.	Dimension (mm)	No. of Tiles / Box	Coverage Area
1.	600x1200	2 pcs.	1.44 sq. mtr.

*Vitrified tiles have resistance to most of the stains / chemicals but, it is recommended to take due care while laying and for day-to-day maintenance.

Resistance to acids & alkalies (Exception Hydrofluoric Acids & its Compounds)

1. Colors in the catalog are as accurate as the printing process allows.

2. Sizes mentioned in the catalog are the nominal sizes only.

3. Conforming to ISO requirements, technical specifications for Kajaria tiles are applicable only for 1st quality tiles.

4. Please inspect all tiles prior to installation; the company will not entertain complaints once tiles are laid / fixed.

5. For better laying, please follow the instructions on the packaging box.

TECHNICAL SPECIFICATION - FULL BODY VITRIFIED TILES

S. No.	Property	Group Bla - ISO 13006/EN-176	Group Bla IS : 15622:2017	Our Value	Test According to
Dimensions & surface Quality					
1.	Deviation in length and width	± 0.6%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
2.	Deviation in thickness	± 5%	± 5%	± 4%	ISO 10545:2/IS:13630 (P-1)
3.	Deviation in Straightness of sides	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
4.	Deviation in Rectangularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
5.	Deviation in Surface Flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545:2/IS:13630 (P-1)
6.	Surface Quality (%)	Minimum 95%	Minimum 95%	No visible defects	ISO 10545:2/IS:13630 (P-1)
Physical charactersitics					
7.	Scratch Hardness of surface Moh's scale	Required	Min. 5	Min. 5	EN-101/IS:13630 (P-13)
8.	Water absorption	≤0.5%	Averages 0.08, Individual maximum, 0.1%	≤0.05%	ISO 10545:3/IS: 13630 (P-2)
9.	Moisture Expansion	Nil	0.02 Max	Nil	ISO 10545:10
10.	Deep Abrasion	max 175 mm ³	max 140 mm ³	≤140 mm ³	ISO 10545:6/IS:13630 (P-12)
Mechanical charactersitics					
11.	Breaking strength	1300 N	Min 1300	≥ 2000N	ISO 10545:4/IS: 13630 (P-6)
12.	Modulus of rupture	≥ 35 N/mm ²	Average 35, Individual minimum 32	≥ 35 N/mm ²	ISO 10545:4/IS: 13630 (P-6)
Safety charactersiticsDensity					
13.	Density	Required	Min 2.20 gm/cc	2.34 gm/cc	DIN 51082/IS: 13630 (P-2)
14.	Skid resistance (Friction coeeficient)	≥ 0.4	-	≥ 0.4	ISO 10545:17
Thermo photo charactersitics					
15.	Thermal shock resistance	Resistant to 10 cycles	Min 10 cycles	Pass min 10 cycles	ISO 10545:9/IS: 13630 (P-5)
16.	Co efficient of thermal expansion	9×10 ⁻⁶ K ⁻¹ Max	6×10 ⁻⁶ K ⁻¹ Max	<6×10 ⁻⁶ K ⁻¹ Max	ISO 10545:8/IS:13630 (P-4)
17.	Frost resistance	Resistant	Required	Resistant	ISO 10545:12/IS: 13630 (P-10)
18.	Color Resistance to UV light	Resistant	-	Resistant	DIN 51094
Chemical characteristics charactersitics					
19.	Stain Resistance	Min Class 3	Required	Min conform to class 4	ISO 10545:14
20.	Chemical Resistance HOUSE HOLD CHEMICAL & SWIMMING POOL SALT	min class-UB	Required	Conform to classes-UA	ISO 10545:13/IS:13630 (P-7)
21.	Chemical Resistance LOW CONCENTRATIONS ACID & ALKALIES	min class-ULB	Required	Conform to classes-U LA	ISO 10545:13/IS:13630 (P-7)
22.	Chemical Resistance HIGH CONCENTRATIONS ACID & ALKALIES	min class-UHB	Required	Conform to classes-UHA	ISO 10545:13/IS:13630 (P-7)

Packing Details

S. No.	Dimension (mm)	No. of Tiles / Box	Coverage Area
1.	600x1200	2 pcs.	1.44 sq. mtr.
2.	600x600	4 pcs.	1.44 sq. mtr.

* Vitrified tiles have resistance to most of the stains/chemicals but, it is recommended to take due care while laying and for day-to-day maintenance.

Resistance to acids & alkalies (Exception Hydrofluoric Acids & its Compounds)

1. Colours in the catalog are as accurate as printing process allows

2. Sizes mentioned in the catalog are the nominal sizes only.

3. Conforming to ISO requirements, technical specifications for Kajaria tiles are applicable only for 1st quality tiles.

4. Please inspect all tiles prior to installation; company will not entertain complaints, once tiles are laid / fixed.

5. For better laying, please follow the instructions on the packaging box.

KAJARIA EXPERIENCE CENTRES

NORTH

CHANDIGARH :

Plot No. 66, 1st & 4th Floor, Industrial Area Phase-2, Chandigarh – 160002
M: +91 8448188918, +91 9878827262, +91 9779021253

JAIPUR :

Ground Floor, Nidhi Kamal Tower, Plot No 37-38 B, Barwara House, Ajmer Road, Rajasthan, Jaipur - 302006, M: +91 9799495766, +91 9001094841

VARANASI :

Arazi No.-678/1, House No.-S-2/656E, Circuit House Road, Sikroul, Bhojubeer, Near Dressland Store Varanasi -221002
T: 0542-2500483 M: +91 9005092402

DEHRADUN :

485,Dharampur,HaridwarRoad, Dehradun, Uttarakhand-248001
T: 0135-2675329, M: +91 9760044701

LUDHIANA :

U.G.F., Sandhu Tower, II-B-3369, Gurdev Nagar, Ferozepur Road, Punjab, Ludhiana – 141001
M: +91 9779021270, +91 9779021251

JAMMU :

Marble Market, Near Samsung Plaza, Satyam Road Trikuta Nagar, Jammu-180012
M: +91 7827993481

LUCKNOW :

2nd Floor, Plot No. 146, Ayodhya Road, Above Kalyan Jewelers, Near Bhootnath Metro Station, Uttar Pradesh, Lucknow – 226016
M: +91 97932 99660, + 91 9936195455, +91 9793565551

SOUTH

BANGALORE :

Farah Icon, Site No - 119, 1st & 2nd Floor, Opp. New Passport Kendra, Lal Bagh Road, Bangalore 560027
M: +91 9008402952, +91 9008402922, +91 9008402956

COIMBATORE :

1st Floor, 57, Cowley Brown Road, Near Central Library, R.S.Puram Coimbatore, Tamil Nadu -641002
T: 0422-4350801/03

TRIVANDRUM :

87/3, Shining Tower, Opposite Sainik School, Kazhakkootam, Thiruvananthapuram, Kerala, 695585, T: 0471-2422777
M: +91 8527988335, +91 8527571666

CHENNAI :

Fagun Chambers, Old No: 7, New No: 26A/2, 1st Floor, Ethiraj Salai, Egmore Chennai, Tamil Nadu – 600008
T: 044-42691094/ 28264990

HYDERABAD :

Vamsiram Joyti Ridge Building, 2nd Floor, Road No 36, Jublihills Extension, Madhapur, Hyderabad 500033
M: + 91 7680000890, +91 8287905851

CALICUT :

104, Prism Arcade, Thondayad Bypass, Palazhi, Kozhikode, Kerala, 673016
M.: +91 92894 51276, +91 94477 34329

KOCHI :

Building No.32/375 , Creators Haven, Near St. Jude Church, Edappally Pukkattupady Road, Unichira, Kochi, Kerala – 682033, M: +91 9447718391, T: 0484-2912000

CENTRAL

RAIPUR :

Opposite Bank Of Baroda, Beside Tata Motors, Deopuri, New Dhamtari Road, Raipur, Chhattisgarh 492015
M: +91 81033 66905, +91 99815 28088

INDORE : (Regional Office)

S.A. Tower, 1st Floor, 13/3 New Palasia, Opp. Arya Samaj Building, Indore - 452001, M: +91 9752593462, +91 9630025576

WEST

MUMBAI :

Basement, Ground & 1st Floor, Suraksha Ace, Near Chakala Metro Station, Opposite Kotak Bank, Vijay Nagar Colony, J B Nagar, Andheri East, Mumbai, Maharashtra 400059, M: + 91 8968586560, +91 9004679563

PUNE :

2nd , 3rd & 6th Floor, 601-A, DSK Gandharv Heights, Ganeshkhind Road, Shivajinagar, Pune, Maharashtra 411005, M: + 91 7757000568, +91 9730088497

AHMEDABAD : (Regional Office)

Office No. 506-507, Majestic Square, Opp. Shaleen Hospital, Science City Road, Sola Ahmedabad -380060
M: +91 9998804440

EAST

KOLKATA : (Regional Office)

Tirupati Plaza, 2nd Floor, 74/2, Acharya Jagdish Chandra Bose Road Kolkata - 700016, West Bengal
T: +91 9007011022, +91 9007011019, +91 9007062814

PATNA : (Regional Office)

'ANCHAL', House No. - 15, Ground Floor Justice Narayan Path, Nageswar Colony, Patna - 800001, Bihar
T: +91 9334791993, +91 9771458963, +91 7781005449

NOTES

NOTES

Kajaria
INDIA'S NO.1 TILE COMPANY



KAJARIA CERAMICS LIMITED

Corporate Office: J1/B1 (Extn.), Mohan Co-op Industrial Estate, Mathura Road, New Delhi-110044, Ph.: 011-26946409
Regd Office: SF-11, Second Floor, JMD Regent Plaza, Mehrauli Gurgaon Road, Village Sikanderpur Ghosi, Gurgaon-122001, Haryana, Ph.: 0124-4081281
CIN No.: L26924HR1985PLC056150, E-mail: info@kajariaceramics.com, Web.: www.kajariaceramics.com | Toll-free : 1800-309-309

Follow us on      